

Impact resistant ceiling, wall, and pillar luminaires · unshielded

Housing: One piece die-cast aluminum supplied with universal mounting bracket for direct attachment to 3½" or 4" octagonal wiring box. Die castings are marine grade, copper free ($\leq 0.3\%$ copper content) A360.0 aluminum alloy.

Enclosure: Molded clear glass refractor, ¼" thick with internal optical texture and white ceramic coating provides a very uniform light distribution. Fully gasketed with a molded silicone rubber gasket for water tight operation. One piece die-cast aluminum guard, secured by captive, socket head screws threaded into stainless steel inserts. Interior of the lamp compartment is painted white.

Electrical: 2.9W LED luminaire, 5 total system watts, -30°C start temperature. Integral 120V through 277V electronic LED driver, 0-10V dimming. The LED module and driver are mounted on a removable inner assembly for easy replacement. Standard LED color temperature is 3000K with an 90 CRI. Available in 4000K (90 CRI); add suffix K4 to order.

Note: LEDs supplied with luminaire. Due to the dynamic nature of LED technology, LED luminaire data on this sheet is subject to change at the discretion of BEGA-US. For the most current technical data, please refer to www.bega-us.com.



Finish: All BEGA standard finishes are polyester powder coat with minimum 3 mil thickness. Available in four standard BEGA colors: Black (BLK); White (WHT); Bronze (BRZ); Silver (SLV). To specify, add appropriate suffix to catalog number. Custom colors supplied on special order.

CSA certified to U.S. and Canadian standards for wet locations. Protection class IP65

Weight: 3.2 lbs.

Luminaire Lumens: 243

Type:
 BEGA Product:
 Project:
 Voltage:
 Color:
 Options:
 Modified:

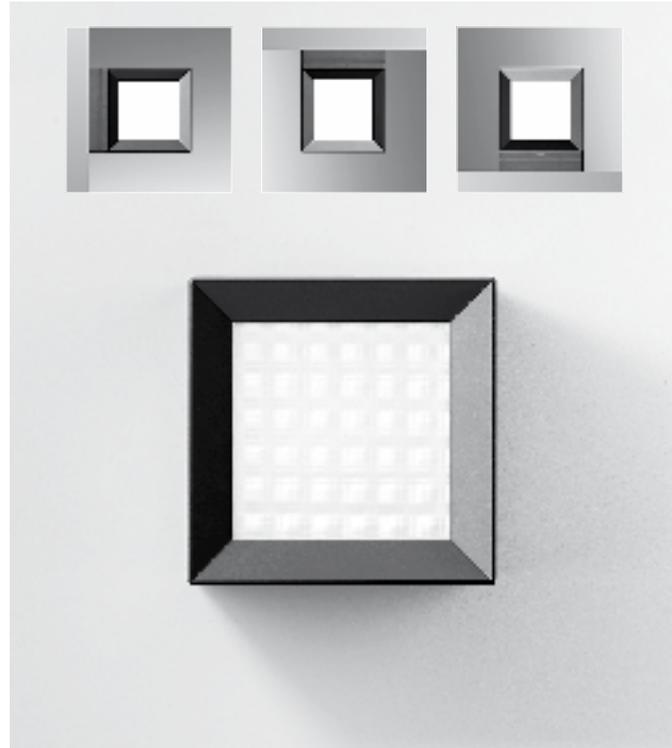

	Lamp	A	B	C
22 423	2.9W LED	4¾"	4¾"	6⅝"

BEGA 1000 BEGA Way, Carpinteria, CA 93013 (805) 684-0533 FAX (805) 566-9474 www.bega-us.com

©copyright BEGA 2018 Updated 06/18/2018