


Tools Required:
6mm hex key



Dimensions

- A:** 69 "
- B:** 39-3/8 "
- C:** 24-1/4 "
- D:** 7 "

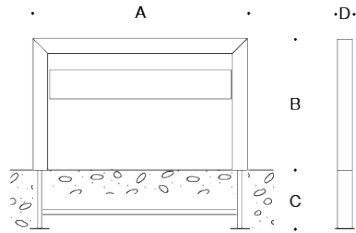

Protection Class: IP 65

Weight: 106 lbs.

Notice to Installer for 99 069:

1. See page 2 for specific product safety warnings.
2. Luminaire anchorage is rated for direct burial installations.
3. Consult structural engineer and local codes for burial and foundation size and specs.
4. Anchorage post is buried below finished grade. Attention to alignment, leveling, and location is required for proper installation
5. Wet location listing does not imply suitability for exposure to standing water for long periods of time.
6. Fixture may be damaged if connected to conduit systems that contain water - Article 300-5G of the National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends."
7. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

99 069 installation:

1. Pull supply wiring to a length where splices can be seen and made through the access door.
2. Route supply wiring through the anchorage and install anchorage into ground by digging a trench.

NOTE: SIZE OF THE FOUNDATION REQUIRED TO SET THE UNIT IN CONCRETE MUST BE DETERMINED AT SITE BY STRUCTURAL ENGINEER.

3. Use special tool provided to unlock the access door lock and remove access door. Route the luminaire wiring down and out the hand hold for connections to be made later.
4. Loosen (4) M8 set screws at the base of the fixture and place the fixture over the anchorage base, shown in Figure 1. Tighten (4) M8 set screws to make sure the fixture is in place and secure.
5. Make supply wiring and luminaire wiring connections inside the luminaire:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE.
6. Replace access door and lock.

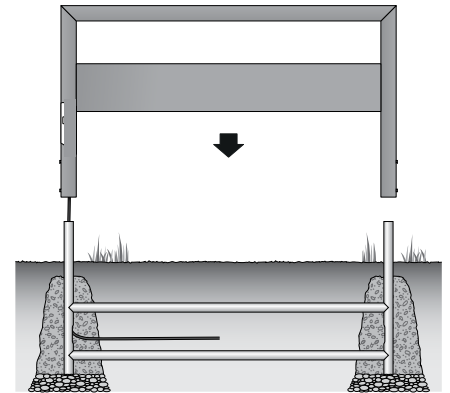


Figure 1

Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

<u>Description</u>	<u>Part No</u>
Driver (120-277V)	75989-03

Lamp: 47.2W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

CAUTION- RISK OF FIRE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

ATTENTION- RISQUE D'INCENDIE. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.