

Application

The thick-walled crystal glass of this downlight brings sparkle and added interest to any ceiling surface, while the inner frosted section provides glare control and minimizes the direct view of the LED source. The compact, shallow housing is ideal for areas with low ceiling heights such as lobbies and corridors.

Materials

Crystal glass diffuser, partially frosted with screw neck
 Reflector surface made of pure anodized aluminum
 Die-cast aluminum housing

NRTL listed to North American Standards, suitable for damp locations
 Weight: 4.9lbs

Electrical

Operating voltage	120-277VAC
Minimum start temperature	-30° C
LED module wattage	17.0W
System wattage	20.0W
Controllability	0-10V dimmable
Color rendering index	Ra > 90
Luminaire lumens	2,113 lumens (4000K)
LED service life (L70)	60,000 hours

LED color temperature

- 4000K - Product number + **K4**
- 3500K - Product number + **K35**
- 3000K - Product number + **K3**
- 2700K - Product number + **K27**

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

Select the desired material finish by using appropriate code number as suffix.


Available finishes	White	Code number .1
	Stainless steel	Code number .2

Type:

BEGA Product:

Project:

Modified:

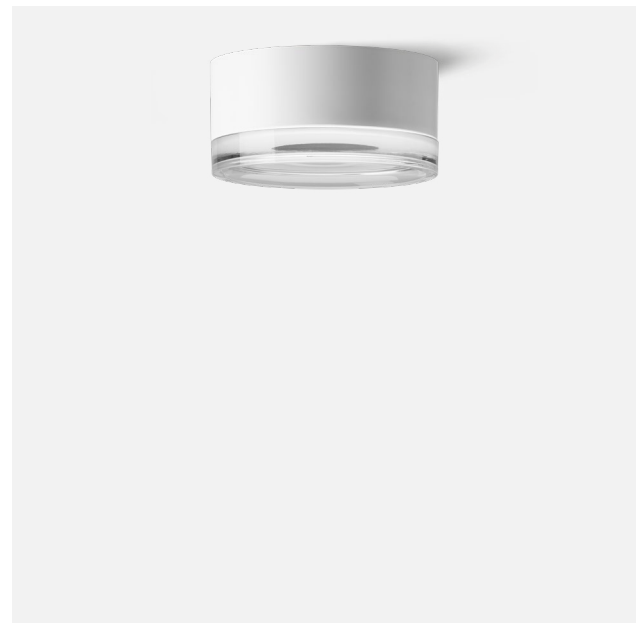

Ceiling luminaire · Downlight

	LED	A	B
50570	17.0W	7	3¾