

24 V DC Recessed wall luminaires
Unshielded, shielded or directed light

A series of compact recessed wall luminaires, round or square, for operation with 24 V DC power supply units. Ideal as a marker light for a large number of indoor and outdoor lighting applications, including corridors, pathways and staircases, or wherever potentially dangerous areas should be illuminated.

Luminaires require a remote 24 V DC class 2 power supply suitable to operate the intended LED wattage, see page 405.

Die-cast aluminum housing with die-cast aluminum faceplate
Safety glass with optical texture or white glass
Reflector made of pure anodized aluminum

LED color temperatures: 2700K, 3000K, 3500K, 4000K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.


NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65




Unshielded				
		LED	A	B
22 109*	Round	2.1 W	3 1/8	4
22 202*	Square	2.1 W	3 1/8	4

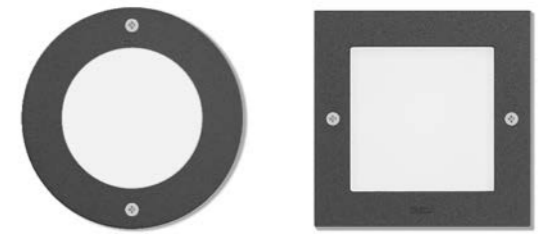

Shielded				
		LED	A	B
22 101*	Round	2.1 W	3 1/8	4
22 203*	Square	2.1 W	3 1/8	4



Directed light					
		LED	A	B	C
22 794*	Round	2.0 W	3 1/8	4	3/4
22 230*	Square	2.1 W	3 1/8	4	-

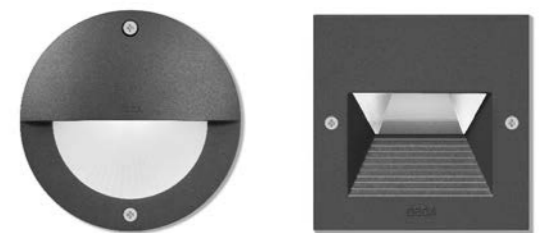

* Remote driver required