



The luminaires can be installed in any orientation.

Wall luminaires
with directed light

A series of wall mounted luminaires with directed light. The flush mounted luminaire glass distributes the light onto the installation surface uniformly with wide-spread light distribution. Luminaires can be mounted with the light emission upwards or downwards.

BEGA 19 542 and 19 543 small opening wiring box (included) required for proper installation.


Die-cast aluminum · Safety glass with optical structure

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65

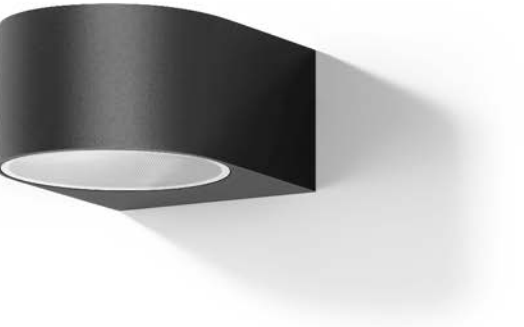

| Light emission on one side | | | | | |
|-----------------------------------|-------|-------|-------|-------|---------------------|
| | LED | A | B | C | Required wiring box |
| 33 223 | 3.0 W | 4 | 2 3⁄8 | 5 1⁄4 | 19 542 |
| 33 224 | 6.3 W | 5 1⁄2 | 2 3⁄8 | 7 3⁄8 | 19 543 |