



Wall luminaires

with light emission on one or two sides

A series of wall mounted luminaires with one-sided or two-sided light output. Arranged individually or in groups, they are great design elements for a host of lighting applications.

BEGA 19 537 small opening wiring box (included) required for proper installation.


Die-cast and extruded aluminum · Matte safety glass

LED color temperatures: 2700K, 3000K, 3500K, 4000K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.


NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65

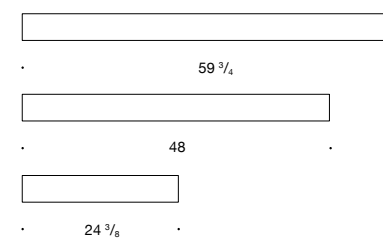

Light emission on one side



Light emission on two sides



Light emission on **one side**

	LED	A	B	C	Required wiring box
44 417	9.5 W	24 3/8	4 1/8	5	19 537
44 418	22.8 W	48	4 1/8	5	19 537
44 419	30.4 W	59 3/4	4 1/8	5	19 537

Light emission on **two sides**

	LED	A	B	C	Required wiring box
44 436	17.6 W	24 3/8	4 1/8	5	19 537
44 437	23.2 W	48	4 1/8	5	19 537
44 438	30.4 W	59 3/4	4 1/8	5	19 537