



Pendant luminaires

Shielded symmetric wide beam light distribution

A series of pendant luminaires with shielded or symmetric wide beam light distribution. The pendants with the clear synthetic diffuser create vertical illumination in addition to the downward light ideal for high activity spaces. The pendants with shielded light provide downward directed light ideal for down lighting atriums, passages, and other large covered spaces.


Die-cast aluminum · Clear safety glass or clear acrylic diffuser
Reflector made of pure anodized aluminum

LED color temperatures: 2700K, 3000K, 3500K, 4000K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65

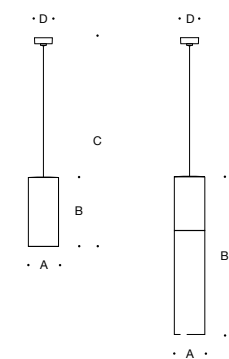

| Pendant | | | | |
|---------------|--------|-------|--------|--------|
| LED | A | B | C | D |
| 24 507 | 35.7 W | 7 1/2 | 17 1/4 | 103 4% |

| Pendant with clear synthetic cylinder | | | | |
|---------------------------------------|--------|-------|--------|--------|
| LED | A | B | C | D |
| 24 508 | 35.7 W | 7 1/2 | 38 3/4 | 125 4% |

