

The façade floodlights can be installed on ground surfaces as well as ceiling surfaces.

### Facade floodlights

with symmetric or asymmetric light distribution

A series of facade floodlights with symmetric or asymmetric light distribution specifically designed for the illumination of building facades. This family makes it extremely easy to create continuous runs of light using simple plug connectors and wall mount brackets.


Die-cast aluminum · Safety glass · Reflector made of pure anodized aluminum

LED color temperatures: 2700K, 3000K, 3500K, 4000K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at [www.bega-us.com](http://www.bega-us.com)

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations  
Protection class IP 65



#### Floodlight · narrow

	LED	$\beta$	A	B	C
<b>77 152</b>	16.8 W	12/84°	20 ½	4 ½	2 ¼
<b>77 153</b>	33.6 W	14/87°	39 ¾	4 ½	2 ¼



#### Floodlight · wide


	LED	$\beta$	A	B	C
<b>77 154</b>	16.8 W	32/93°	20 ½	4 ½	2 ¼
<b>77 155</b>	33.6 W	32/95°	39 ¾	4 ½	2 ¼



#### Floodlight · asymmetric

	LED	$\beta$	A	B	C
<b>77 156</b>	16.8 W	43/86°	20 ½	4 ½	2 ¼
<b>77 157</b>	33.6 W	46/96°	39 ¾	4 ½	2 ¼

$\beta$  = Beam angle

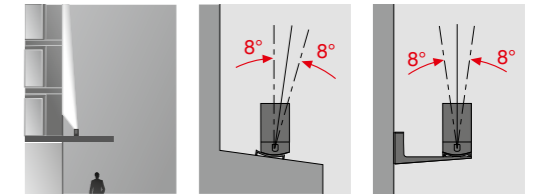

Facade floodlights can be mounted on canopies or external window sills, or can be attached to a facade with wall outrigger arm 71 036. The inclination angle of the floodlight is adjustable.



71 036

#### Wall outrigger arm

		A	B	C
<b>71 036</b>	Wall outrigger arm	6 ½	2 ½	3

#### Connection cables

<b>77 284</b>	Leader cable · 10ft
<b>77 285-ETE</b>	End to End jumper cable
<b>77 285-1</b>	1ft jumper cable
<b>77 285-3</b>	3ft jumper cable
<b>77 285-5</b>	5ft jumper cable
<b>77 285-10</b>	10ft jumper cable





**Facade floodlights** · Tunable white  
with symmetric or asymmetric light distribution

A series of facade floodlights with symmetric or asymmetric light distribution specifically designed for the illumination of building facades. This family makes it extremely easy to create continuous runs of light using simple plug connectors and wall mount brackets.


Die-cast aluminum · Safety glass · Reflector made of pure anodized aluminum

LED color temperatures: 2700 K · 6500 K range


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at [www.bega-us.com](http://www.bega-us.com)

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations  
Protection class IP 65

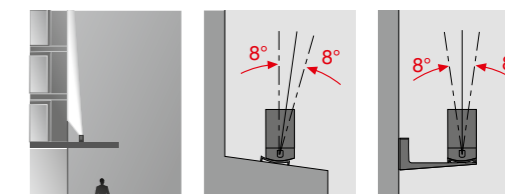

Facade floodlights can be mounted on canopies or external window sills, or can be attached to a facade with wall outrigger arm 71 036. The inclination angle of the floodlight is adjustable.



Floodlight · narrow · tunable white					
	LED	$\beta$	A	B	C
<b>84 375</b>	12.8 W	12/85°	20 1/2	4 1/2	2 1/4
<b>84 376</b>	25.6 W	14/89°	39 3/8	4 1/2	2 1/4

Floodlight · wide · tunable white					
	LED	$\beta$	A	B	C
<b>84 377</b>	12.8 W	32/93°	20 1/2	4 1/2	2 1/4
<b>84 378</b>	25.6 W	32/95°	39 3/8	4 1/2	2 1/4

Floodlight · asymmetric · tunable white					
	LED	$\beta$	A	B	C
<b>84 379</b>	12.8 W	43/77°	20 1/2	4 1/2	2 1/4
<b>84 380</b>	25.6 W	46/77°	39 3/8	4 1/2	2 1/4

$\beta$  = Beam angle



71 036

Wall outrigger arm				
		A	B	C
<b>71 036</b>	Wall outrigger arm	6 1/2	2 1/2	3

#### Connection cables

<b>77 284</b>	Leader cable · 10 ft
<b>77 285-ETE</b>	End to End jumper cable
<b>77 285-1</b>	1 ft jumper cable
<b>77 285-3</b>	3 ft jumper cable
<b>77 285-5</b>	5 ft jumper cable
<b>77 285-10</b>	10 ft jumper cable

