



Light building element
with tiltable distribution

A series of single and twin light building elements with tiltable light distribution from 0° to 10°. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances and atria.

Die-cast and extruded aluminum · Clear safety glass
Reflector made of pure anodized aluminum
Anchorage unit made of galvanized steel

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K


BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65



Asymmetric wide beam

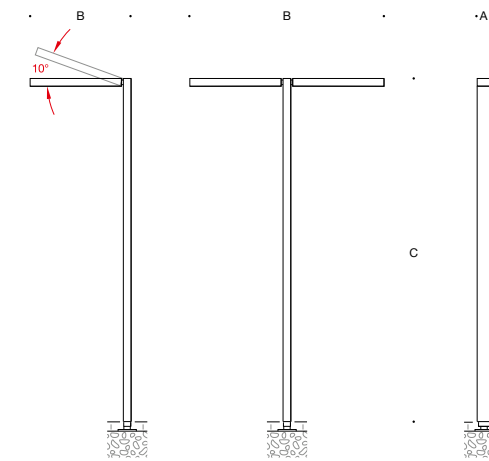

Single light building element					
	LED	A	B	C	Anchorage
88 977	19.2 W	6 1/8"	42 5/8"	181 1/4"	79 802
84 126	39.2 W	6 1/8"	42 5/8"	181 1/4"	79 802

Twin light building element					
	LED	A	B	C	Anchorage
88 978	(2) 19.2 W	6 1/8"	81 5/8"	181 1/4"	79 802
84 127	(2) 39.2 W	6 1/8"	81 5/8"	181 1/4"	79 802

