



Pole-top luminaires

Asymmetric or asymmetric wide beam light distribution

Shielded surface washer luminaires with asymmetric or asymmetric wide beam light distribution. These luminaires provide effective and uniform washing of ground surfaces such as pathways, building entrances, and walkways. Available in single or twin configurations and two light distributions to meet diverse lighting requirements.



Die-cast aluminum · Clear safety glass
Reflector made of pure anodized aluminum

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65

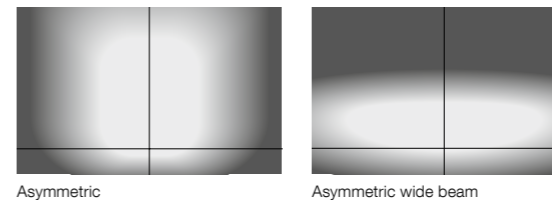

Pole-top luminaires · asymmetric

	LED		A	B	C
99 868	15.6 W	Single	10 ¼	98 ½	12 ½
99 869	(2) 15.6 W	Twin	10 ¼	98 ½	25 ¼

Pole-top luminaires · asymmetric wide beam

	LED		A	B	C
99 878	13.6 W	Single	10 ¼	98 ½	12 ½
99 879	(2) 13.6 W	Twin	10 ¼	98 ½	25 ¼

