


BEGA

Photometric Filename: 12067.IES

TEST: BE_12067
TEST LAB: BEGA
DATE: 3/1/2018
LUMINAIRE: 12 067
LAMP: 9.6W LED

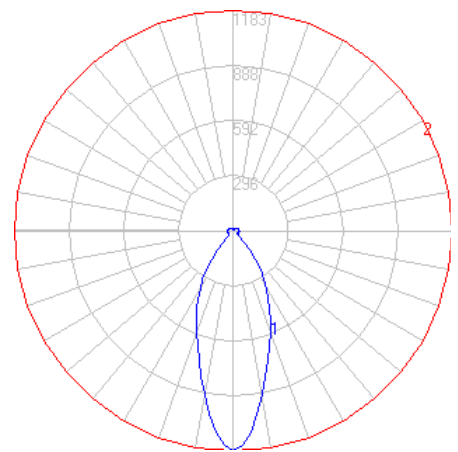


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	962
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	80
Total Luminaire Watts	12
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	0.60
Spacing Criterion (90-270)	0.60
Spacing Criterion (Diagonal)	0.74
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.39 ft (Diameter)
Luminous Height	0.24 ft

Characteristics

NEMA Type	5 H x 5 V
Maximum Candela	1183.4
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	39.2
Vertical Beam Angle (50%)	39.2
Horizontal Field Angle (10%)	82.1
Vertical Field Angle (10%)	82.1
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	287
Beam Efficiency	N.A.
Field Lumens	678
Field Efficiency	N.A.
Spill Lumens	163
Luminaire Lumens	841
Total Efficiency	N.A.
Total Luminaire Watts	12

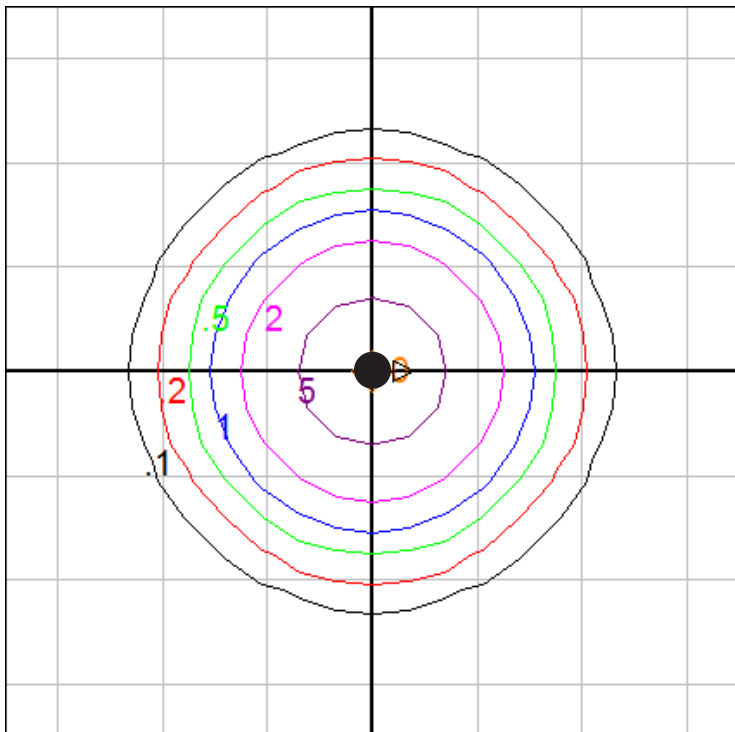

Mounting Height = 10 ft. Grid Spacing = 5 ft.

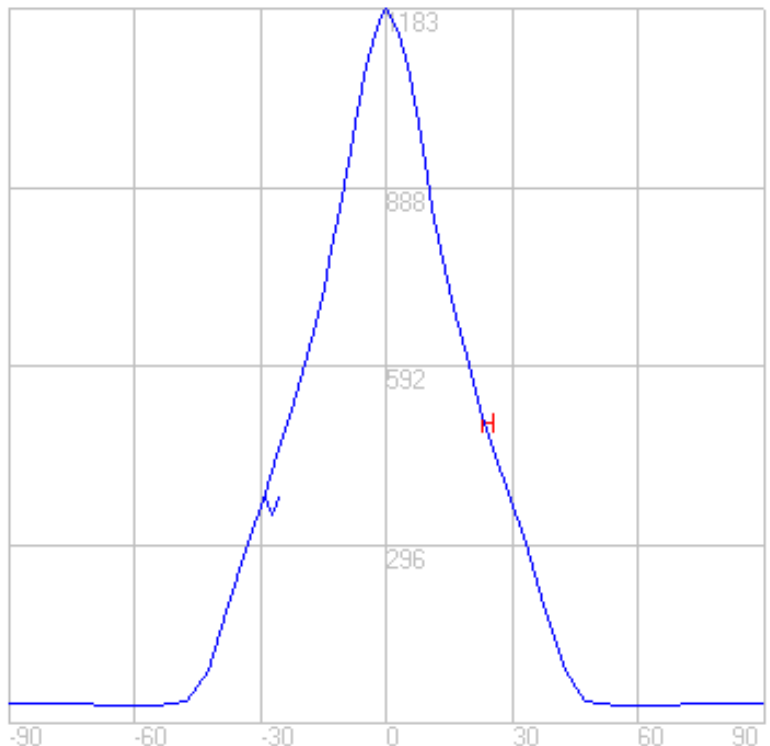

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

9/17/2018