
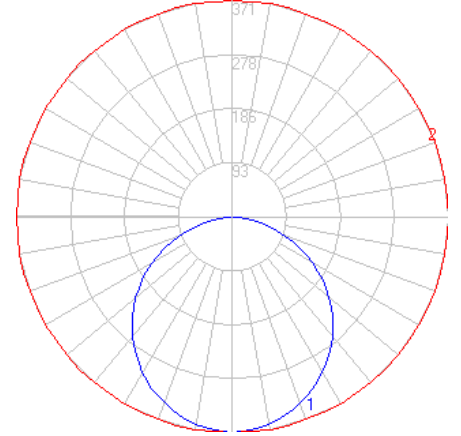


# BEGA

Photometric Filename: 24318.ies

TEST: BE\_24318  
 TEST LAB: BEGA  
 DATE: 6/19/2017  
 LUMINAIRE: 24 318  
 LAMP: 16W LED

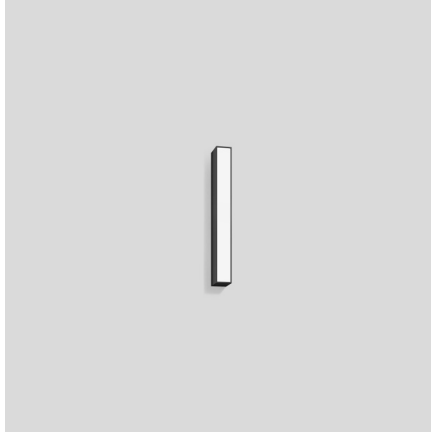


### Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1040
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	55
Total Luminaire Watts	19
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.24
Spacing Criterion (90-270)	1.26
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.16 ft
Luminous Width (90-270)	1.67 ft
Luminous Height	0.00 ft

### Zonal Lumen Summary

Zone	Lumens
0-10	35.05
10-20	100.06
20-30	151.13
30-40	181.80
40-50	188.39
50-60	170.11
60-70	128.81
70-80	70.37
80-90	14.74
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

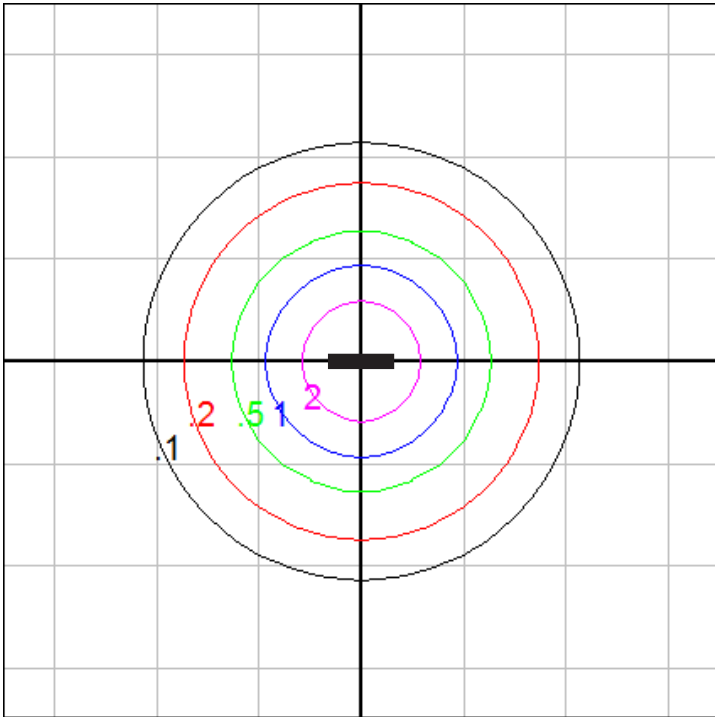

Ceiling Mount - Isofootcandle grid on floor  
 Mounting Height = 10 ft. Grid Spacing = 10 ft.

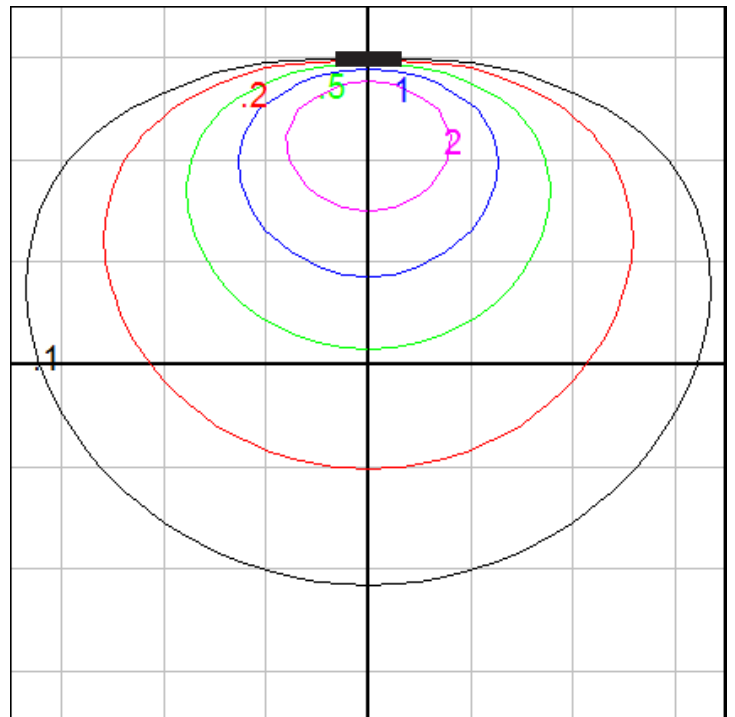

Wall Mount - Isofootcandle grid on floor  
 Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.