
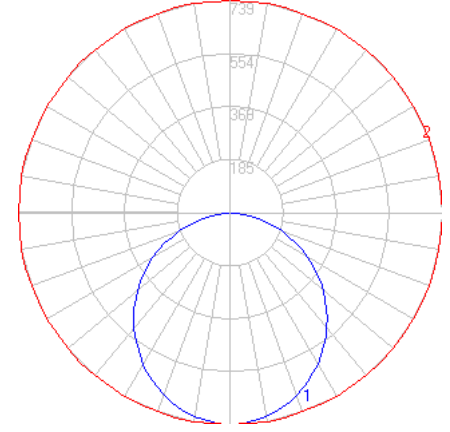


BEGA

Photometric Filename: 24319.ies

TEST: BE_24319
 TEST LAB: BEGA
 DATE: 5/16/2017
 LUMINAIRE: 24 319
 LAMP: 32W LED

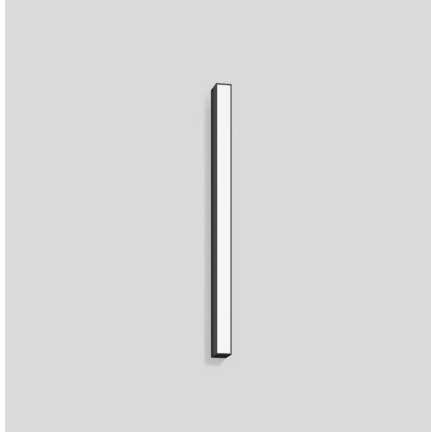


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2039
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	57
Total Luminaire Watts	36
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.24
Spacing Criterion (90-270)	1.26
Spacing Criterion (Diagonal)	1.36
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.16 ft
Luminous Width (90-270)	3.25 ft
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	69.72
10-20	198.65
20-30	298.65
30-40	357.22
40-50	368.15
50-60	330.93
60-70	249.87
70-80	136.76
80-90	29.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

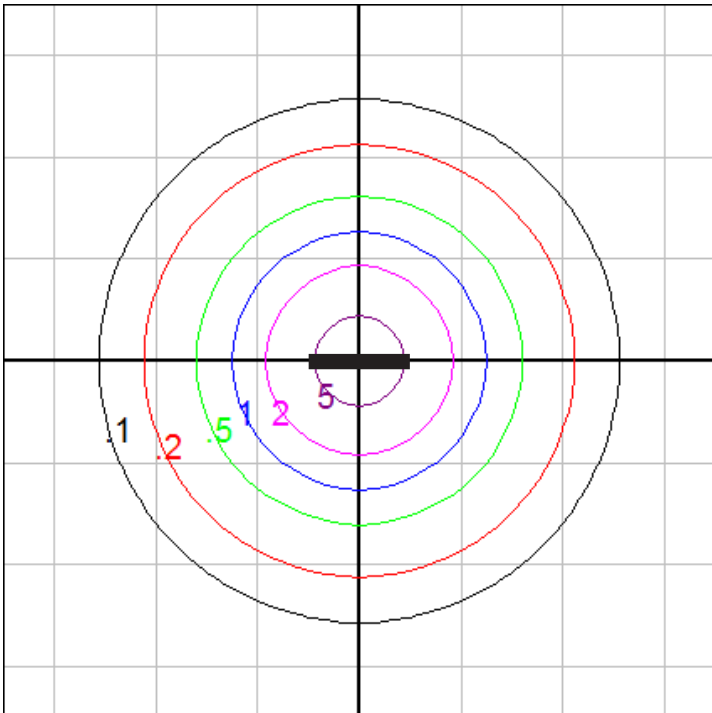

Ceiling Mount - Isofootcandle grid on floor
 Mounting Height = 10 ft. Grid Spacing = 10 ft.

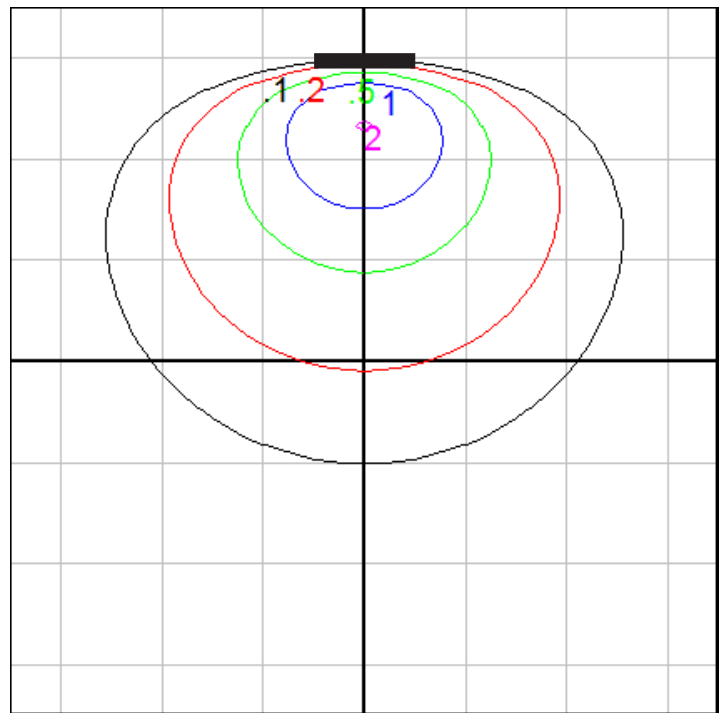

Wall Mount - Isofootcandle grid on floor
 Mounting Height = 5 ft. Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.