


BEGA

Photometric Filename: 24374.ies

TEST: BE_24374
 TEST LAB: BEGA
 DATE: 10/25/2016
 LUMINAIRE: 24 374
 LAMP: 12.3W LED

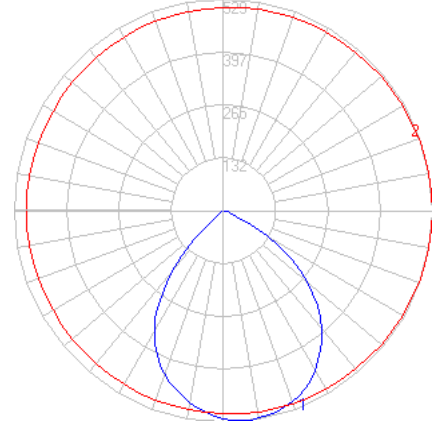



Characteristics

IES Classification	Type II
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1078
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	72
Total Luminaire Watts	15
Ballast Factor	1.00
Upward Waste Light Ratio	N.A.
Max. Cd.	529.4 (0H, 7.5V)
Max. Cd. (<90 Vert.)	529.4 (0H, 7.5V)
Max. Cd. (At 90 Deg. Vert.)	.3 (0.0%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	31 (2.9%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	206.0	N.A.	19.1
FM (30-60)	353.0	N.A.	32.8
FH (60-80)	70.6	N.A.	6.5
FVH (80-90)	2.2	N.A.	0.2
BL (0-30)	185.8	N.A.	17.2
BM (30-60)	228.5	N.A.	21.2
BH (60-80)	30.8	N.A.	2.9
BVH (80-90)	0.9	N.A.	0.1
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	1077.8	N.A.	100.0

BUG Rating B1-U0-G0

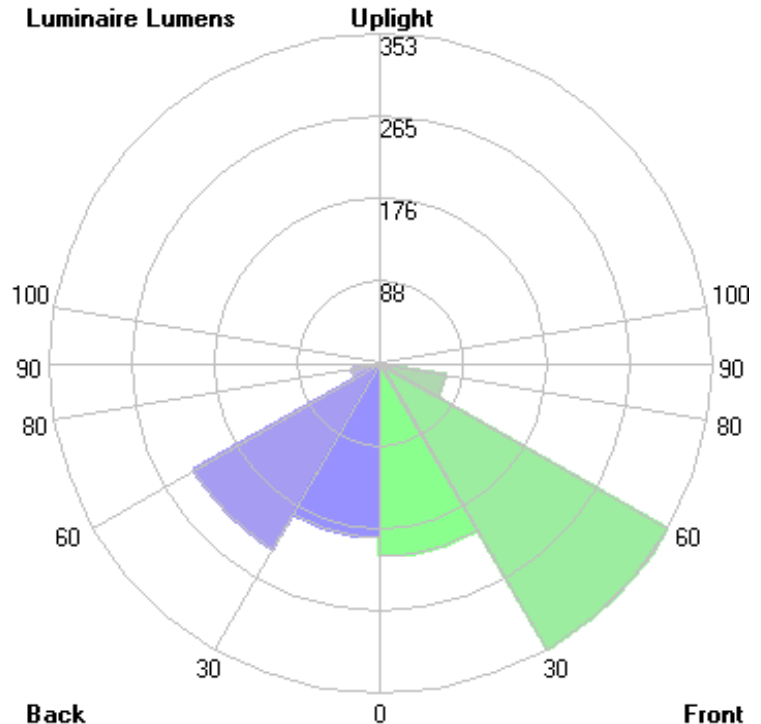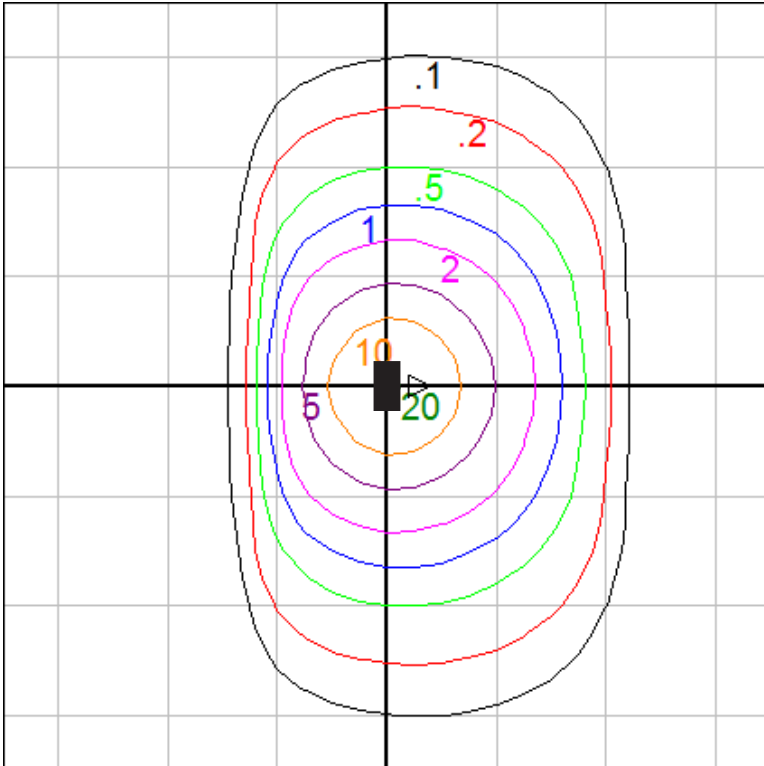

Wall Mount - Isofootcandle grid on floor
 Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.