


BEGA

Photometric Filename: 24507.ies

TEST: BE_24507
 TEST LAB: BEGA
 DATE: 4/4/2017
 LUMINAIRE: 24 507
 LAMP: 35.7W LED

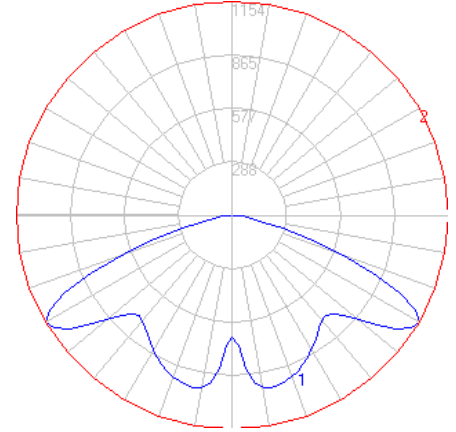


Characteristics

IES Classification	Type V
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	4107
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	103
Total Luminaire Watts	40
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	1153.9 (360H, 60V)
Max. Cd. (<90 Vert.)	1153.9 (360H, 60V)
Max. Cd. (At 90 Deg. Vert.)	.2 (0.0%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	102.6 (2.5%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	380.3	N.A.	9.3
FM (30-60)	1022.1	N.A.	24.9
FH (60-80)	632.3	N.A.	15.4
FVH (80-90)	18.8	N.A.	0.5
BL (0-30)	380.3	N.A.	9.3
BM (30-60)	1022.1	N.A.	24.9
BH (60-80)	632.3	N.A.	15.4
BVH (80-90)	18.8	N.A.	0.5
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	4107.0	N.A.	100.0

BUG Rating B2-U0-G1

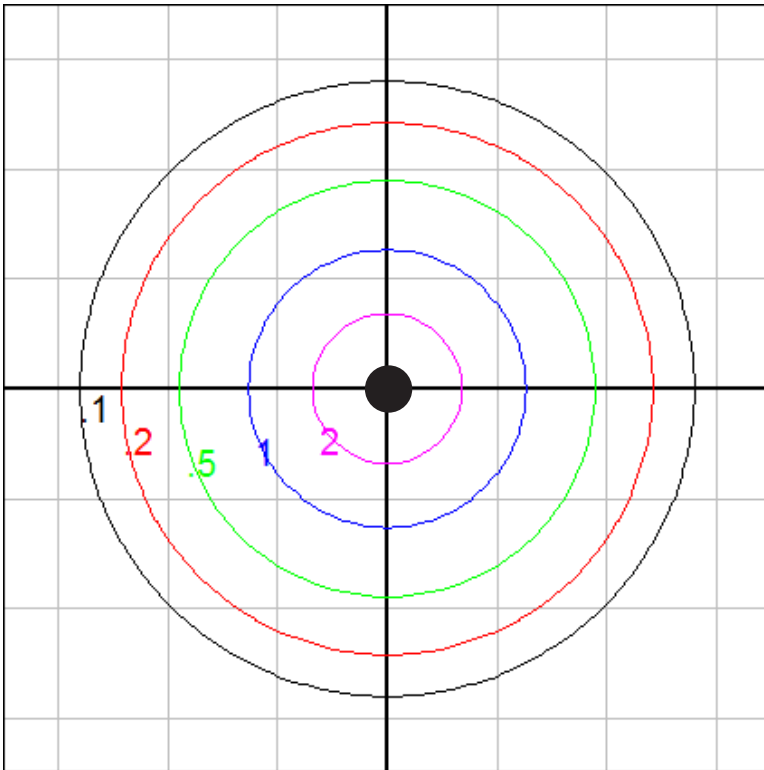

Mounting Height = 15 ft. Grid Spacing = 15 ft.

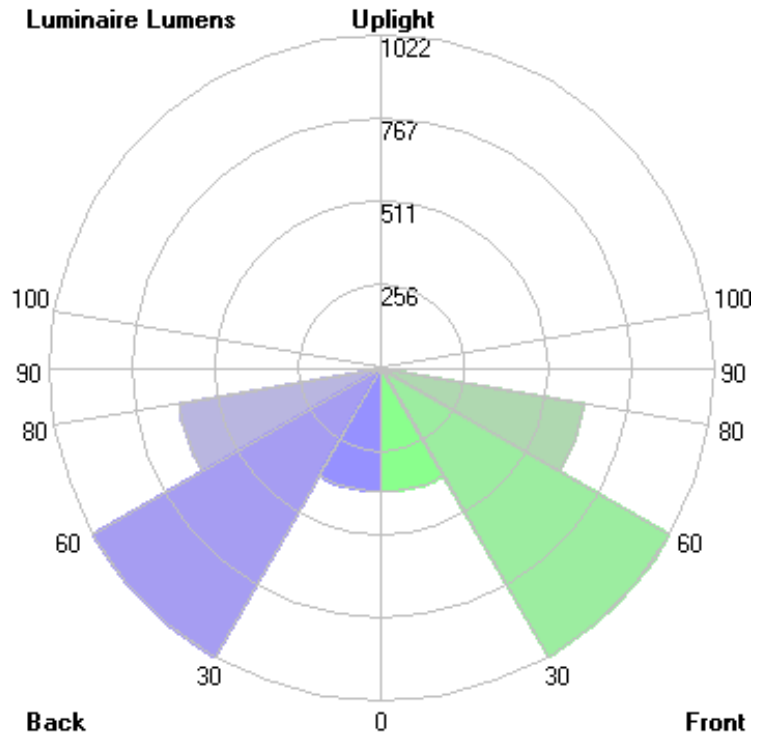

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.