Application
Large-scale rectangular LED luminaire designed to provide high-output, diffuse illumination over very large areas such as lobbies, atriums, and other interior and exterior spaces

Materials
Luminaire housing constructed of die-cast marine grade, copper free (≤0.3% copper content) A360.0 aluminum alloy
White high density polyethylene diffuser
High temperature silicone gasket
Mechanically captive stainless steel fasteners

NRTL listed to North American Standards, suitable for wet locations
Protection class IP65
Weight: 50.0 lbs

Electrical

Operating voltage	120-277VAC
Minimum start temperature	-20° C
LED module wattage	100.8 W
System wattage	115 W
Controllability	0-10V dimmable
Color rendering index	Ra > 80
Luminaire lumens	7105 lumens (3000K)
Lifetime at Ta = 15° C	195,000 h (L70)
Lifetime at Ta = 45° C	165,000 h (L70)

LED color temperature

☐ 4000K - Product number + **K4**
☐ 3500K - Product number + **K35**
☐ 3000K - Product number + **K3**
☐ 2700K - Product number + **K27**

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish
All BEGA standard finishes are matte, textured polyester powder coat with minimum 3 mil thickness.

Available colors ☐ Black (BLK) ☐ White (WHT) ☐ RAL:
☐ Bronze (BRZ) ☐ Silver (SLV) ☐ CUS:

Type:
BEGA Product:
Project:
Modified:



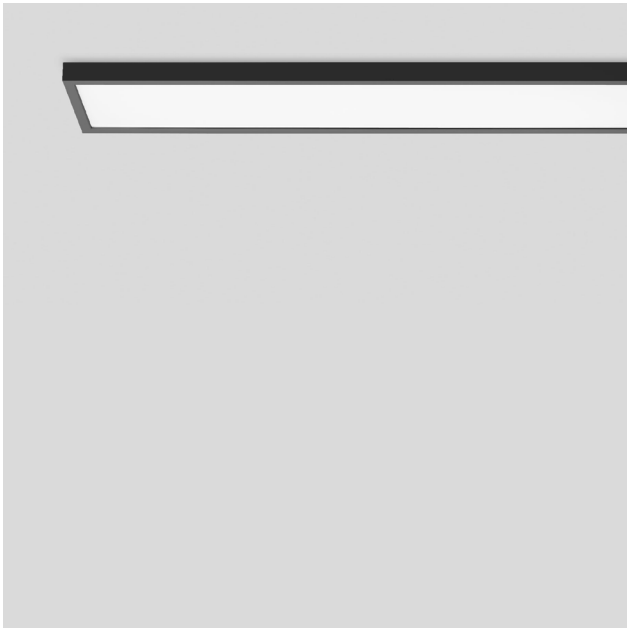

LED large-area ceiling and wall

		LED	A	B
33312	ADA	100.8 W	13 ½ x 60 ½	2 ¼

BEGA 1000 BEGA Way, Carpinteria, CA 93013 (805) 684-0533 info@bega-us.com

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on this sheet is subject to change at the discretion of BEGA North America. For the most current technical data, please refer to bega-us.com
© copyright BEGA 2018
Updated 07/23/18