
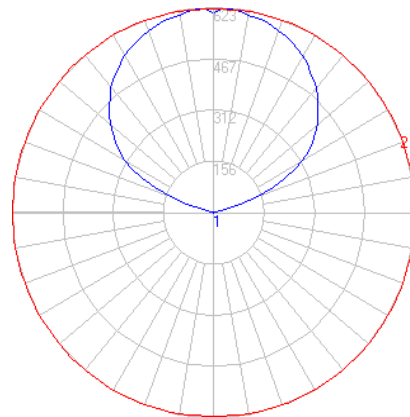


BEGA

Photometric Filename: 33360.IES

TEST: BE33360
TEST LAB: BEGA
DATE: 12/21/2016
LUMINAIRE: 33360
LAMP: 16.5W LED

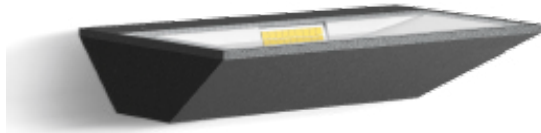


Characteristics


NEMA Type	6 H x 7 V
Maximum Candela	622.8
Maximum Candela Angle	0 H -5 V
Horizontal Beam Angle (50%)	111.5
Vertical Beam Angle (50%)	112.7
Horizontal Field Angle (10%)	127.5
Vertical Field Angle (10%)	153.4
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1463
Beam Efficiency	N.A.
Field Lumens	1706
Field Efficiency	N.A.
Spill Lumens	22
Luminaire Lumens	1728
Total Efficiency	N.A.
Total Luminaire Watts	19

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.01
40-50	0.01
50-60	0.00
60-70	0.00
70-80	0.01
80-90	0.00
90-100	0.74
100-110	31.90
110-120	153.49
120-130	326.60
130-140	380.44
140-150	336.00
150-160	263.30
160-170	170.24
170-180	58.88

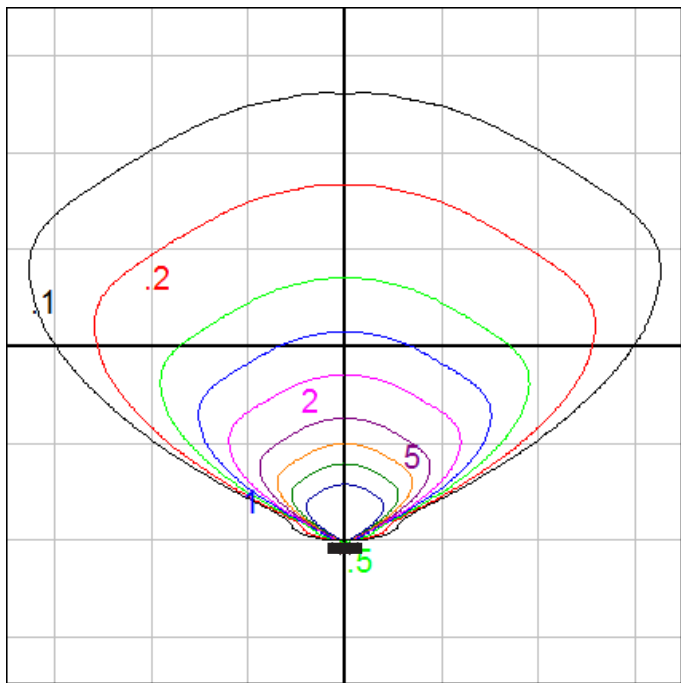

Wall Mounted Fixture - Iso-Grid on Wall
Grid Spacing = 2.5 ft.

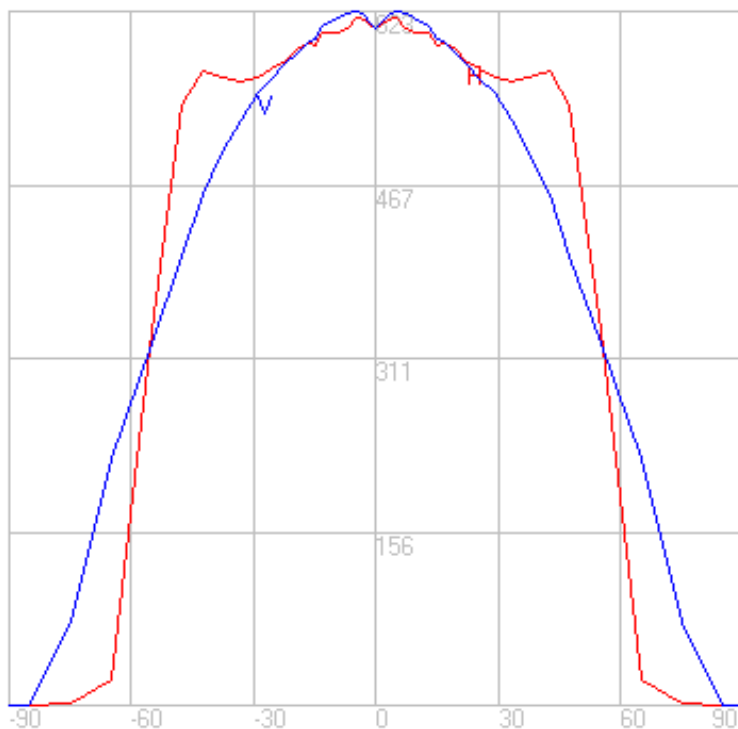

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

6/22/2017