


BEGA

Photometric Filename: 66463.ies

TEST: L071704009
 TEST LAB: LIGHT LABORATORY, INC.
 DATE: 7/18/2017
 LUMINAIRE: 66 463
 LAMP: 62.8W LED

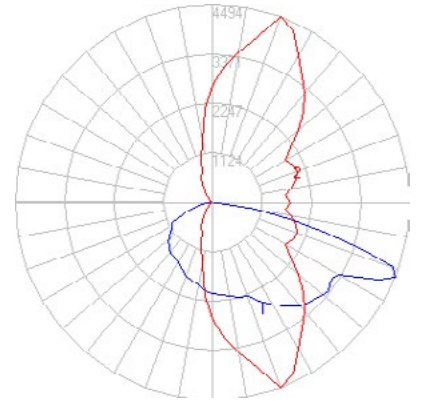

All results in accordance with IESNA LM-79


Characteristics

IES Classification	Type III
Longitudinal Classification	Medium
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	9357
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	123
Total Luminaire Watts	76.3
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	4494 (70H, 67.5V)
Max. Cd. (<90 Vert.)	4494 (70H, 67.5V)
Max. Cd. (At 90 Deg. Vert.)	0 (0.0%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	1316 (14.1%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	1106.2	N.A.	11.8
FM (30-60)	3638.3	N.A.	38.9
FH (60-80)	2339.0	N.A.	25.0
FVH (80-90)	145.0	N.A.	1.5
BL (0-30)	610.8	N.A.	6.5
BM (30-60)	1060.3	N.A.	11.3
BH (60-80)	428.7	N.A.	4.6
BVH (80-90)	28.8	N.A.	0.3
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	9357.1	N.A.	100.0

BUG Rating B2-U0-G2

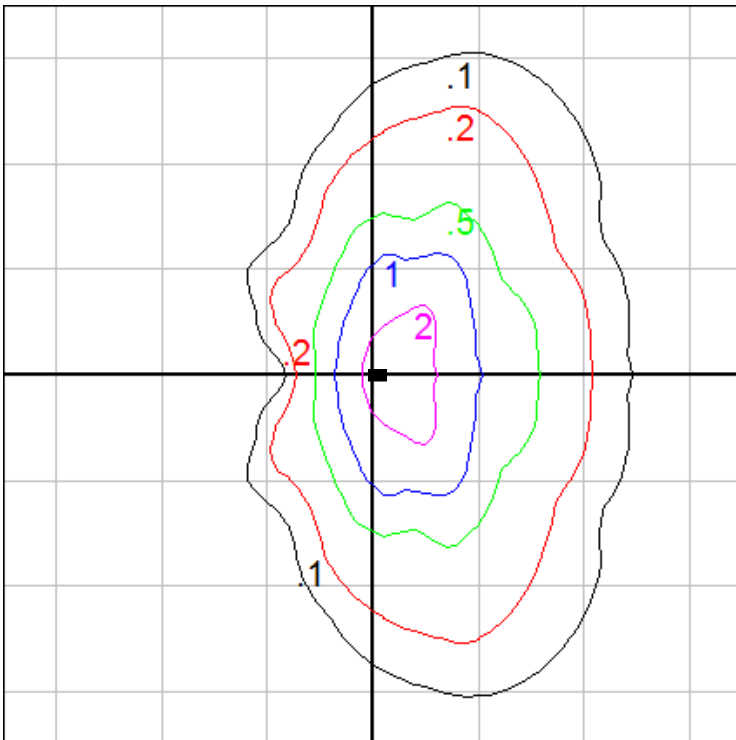

Mounting Height = 30 ft. Grid Spacing = 30 ft.

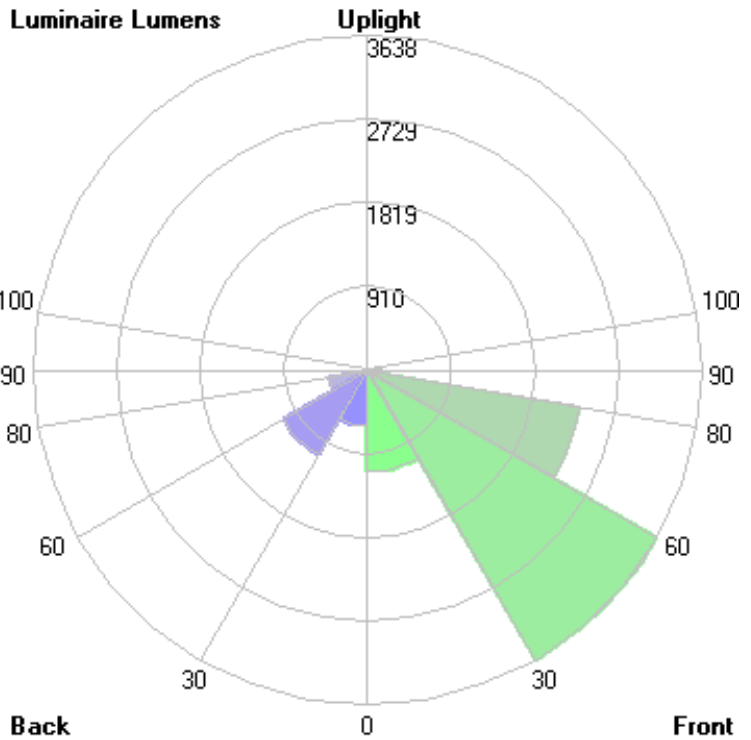


In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA

Photometric Filename: 66463AMB.ies

TEST: L061914302
 TEST LAB: LIGHT LABORATORY, INC.
 DATE: 7/2/2019
 LUMINAIRE: 66463 Amber
 LAMP: 70.4W LED

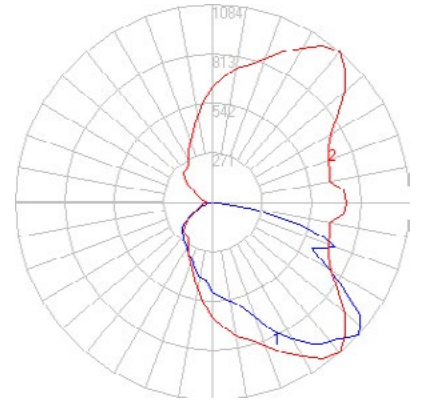

All results in accordance with IESNA LM-79


Characteristics

IES Classification	Type III
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2252
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	28
Total Luminaire Watts	81.59
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	1084 (50H, 47.5V)
Max. Cd. (<90 Vert.)	1084 (50H, 47.5V)
Max. Cd. (At 90 Deg. Vert.)	0 (0.0%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	239 (10.6%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	279.8	N.A.	12.4
FM (30-60)	918.1	N.A.	40.8
FH (60-80)	491.6	N.A.	21.8
FVH(80-90)	27.8	N.A.	1.2
BL (0-30)	148.0	N.A.	6.6
BM (30-60)	269.7	N.A.	12.0
BH (60-80)	109.9	N.A.	4.9
BVH(80-90)	7.2	N.A.	0.3
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	2252.1	N.A.	100.0

BUG Rating B1-U0-G1

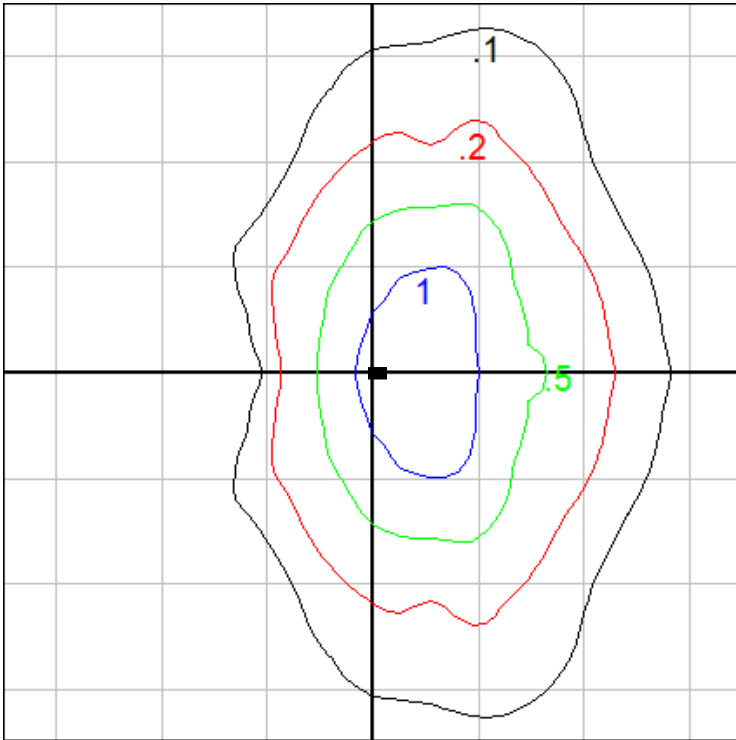

Mounting Height = 20 ft. Grid Spacing = 15 ft.

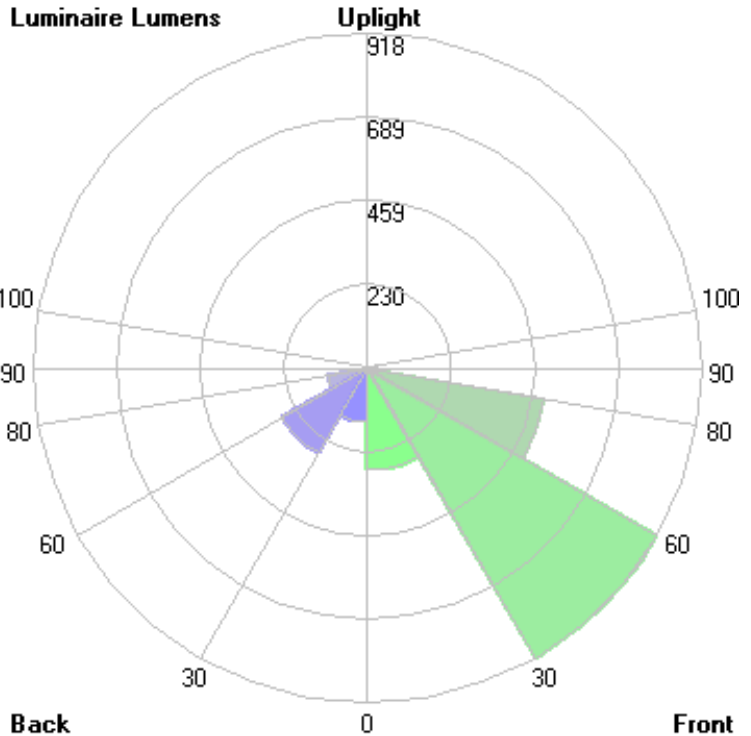

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.