


BEGA

Photometric Filename: 84666.IES

TEST: BE_84666
 TEST LAB: BEGA
 DATE: 2/12/2016
 LUMINAIRE: 84 666
 LAMP: 7.6W LED

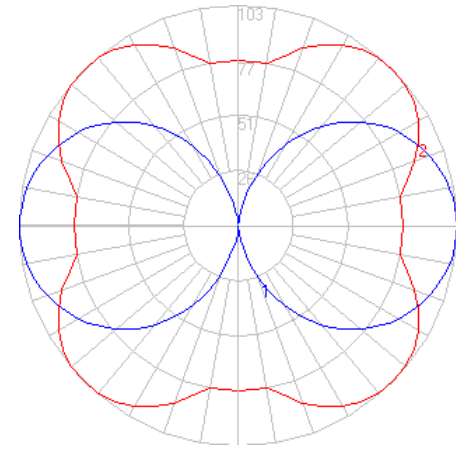


Characteristics

IES Classification	N.A.
Longitudinal Classification	N.A.
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	851
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	95
Total Luminaire Watts	9
Ballast Factor	1.00
Upward Waste Light Ratio	0.50
Max. Cd.	102.8 (45H, 90V)
Max. Cd. (<90 Vert.)	102.6 (45H, 87.5V)
Max. Cd. (At 90 Deg. Vert.)	102.8 (12.1%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	102.6 (12.1%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	9.3	N.A.	1.1
FM (30-60)	69.4	N.A.	8.2
FH (60-80)	85.3	N.A.	10.0
FVH (80-90)	48.7	N.A.	5.7
BL (0-30)	9.3	N.A.	1.1
BM (30-60)	69.4	N.A.	8.2
BH (60-80)	85.3	N.A.	10.0
BVH (80-90)	48.7	N.A.	5.7
UL (90-100)	97.3	N.A.	11.4
UH (100-180)	328.3	N.A.	38.6
Total	851.0	N.A.	100.0

BUG Rating B0-U3-G1

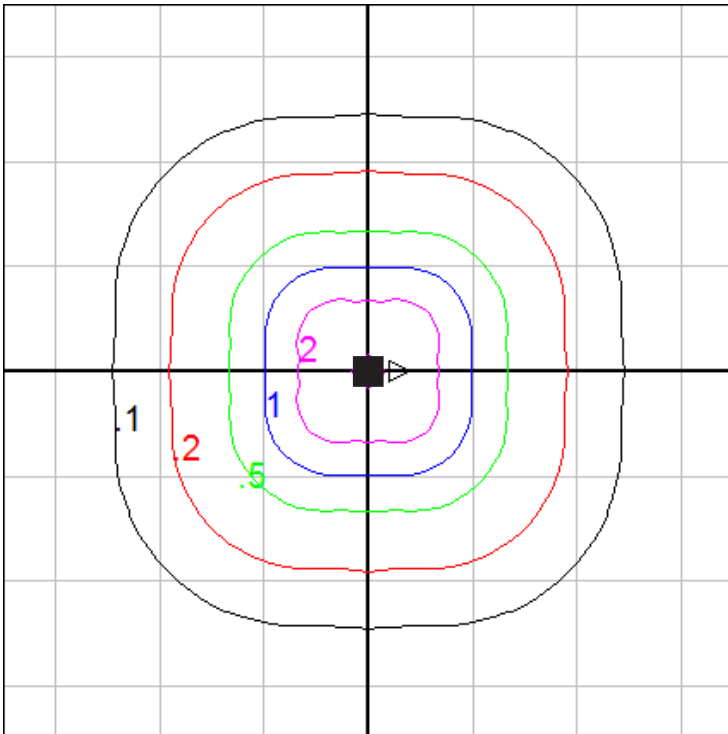

Grid Spacing = 5 ft.

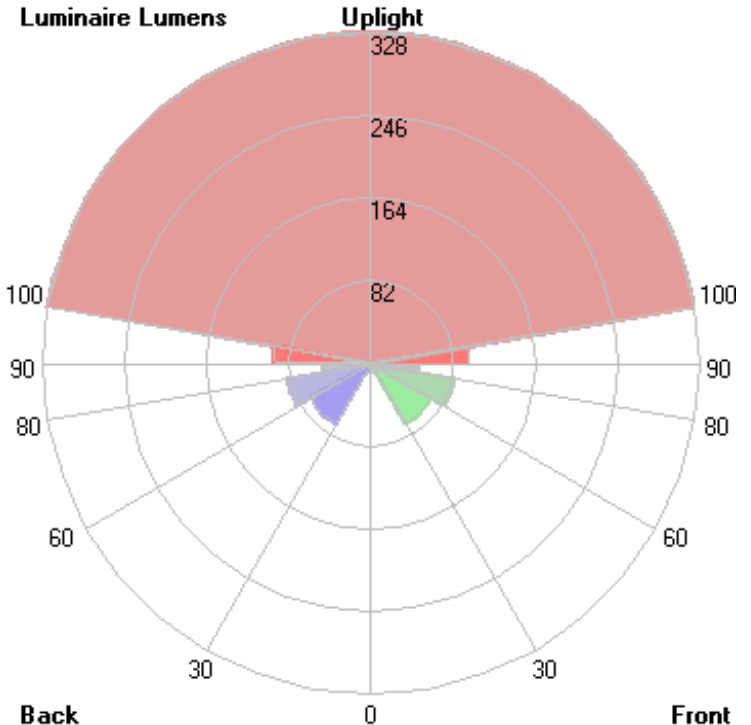

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.