

Unshielded bollards

Post construction: One-piece extruded aluminum with a one-piece die-cast aluminum top housing and base internally welded into an assembly. Die-castings are marine grade, copper free ($\leq 0.3\%$ copper content) A360.0 aluminum alloy.

Enclosure: Heavy walled extruded aluminum vertical elements with die-cast top and bottom end caps, removable for relamping. Secured by four (4) mechanically captive stainless steel fasteners threaded into stainless steel inserts. White acrylic diffuser. Fully gasketed using high temperature, molded silicone gaskets for weather tight operation.

Electrical: 39.0 total luminaire system watts, 33.6W LED. -30°C start temperature. Integral 120V through 277V electronic LED driver, 0-10V dimming. LED module(s) are available from factory for easy replacement. Standard LED color temperature is 3000K with a >80 CRI. Available in 4000K (>80 CRI); add suffix K4 to order.

Note: LEDs supplied with luminaire. Due to the dynamic nature of LED technology, LED luminaire data on this sheet is subject to change at the discretion of BEGA-US. For the most current technical data, please refer to www.bega-us.com.



Anchor base: All BEGA standard finishes are polyester powder coat with minimum 3 mil thickness. Available in four standard BEGA colors: Black (BLK); White (WHT); Bronze (BRZ); Silver (SLV). To specify, add appropriate suffix to catalog number. Custom colors supplied on special order.

Finish: Heavy cast aluminum, slotted for precise alignment. Mounts to BEGA 79 818 anchorage kit. Bollard secures to base with one stainless steel set screw. The mounting system allows the luminaire to be adjusted independent of anchor bolt orientation.

CSA certified to U.S. and Canadian standards for wet locations. Protection class IP65

Weight: 40.2 lbs

Type:
 BEGA Product:
 Project:
 Voltage:
 Color:
 Options:
 Modified:

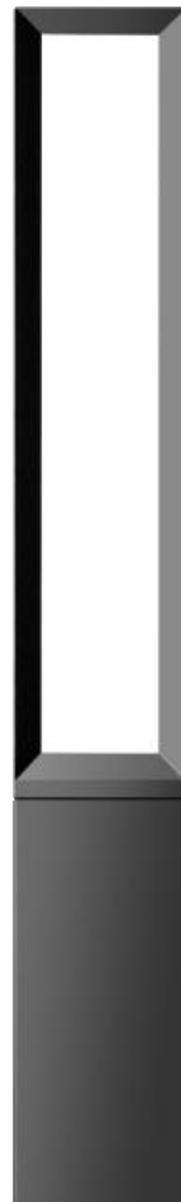

	Lamp	A	B	Anchorage
84 668	39.0W LED	8 $\frac{5}{8}$	47 $\frac{1}{4}$	79 818