

Pole top luminaires with symmetrical light distribution

**Housing/fitter:** Die-cast aluminum construction with a spun aluminum cap. The fixture slip fits a 3" O.D. pole top or tenon and is secured by six (6) socket head stainless steel set screws threaded into stainless steel inserts. Die castings are marine grade, copper free ( $\leq 0.3\%$  copper content) A360.0 aluminum alloy.

**Enclosure:** Molded  $\frac{1}{8}$ " high impact acrylic diffuser with light diffusing matte white surface. Completely sealed with a high temperature silicone gasket for weather tight operation.

**Electrical:** 16.8W LED luminaire, 28.6 total system watts, -30°C start temperature. Integral 120V through 277V electronic LED driver, 0-10V dimming. Standard LED color temperature is 4000K with a  $>80$  CRI. Available in 3000K ( $>80$  CRI); add suffix K3 to order.

**Note:** Due to the dynamic nature of LED technology, LED luminaire data on this sheet is subject to change at the discretion of BEGA-US. For the most current technical data, please refer to [www.bega-us.com](http://www.bega-us.com).

**Finish:** All BEGA standard finishes are polyester powder coat with minimum 3 mil thickness. Available in four standard BEGA colors: Black (BLK); White (WHT); Bronze (BRZ); Silver (SLV). To specify, add appropriate suffix to catalog number. Custom colors supplied on special order.



**UL** listed for US and Canadian Standards, suitable for wet locations. Protection class: IP65.

**Weight:** 12.4 lbs.

**EPA (Effective projection area):** 0.7 sq. ft.

**Luminaire Lumens:** 1716  
Tested in accordance with LM-79-08

Type:  
BEGA Product:  
Project:  
Voltage:  
Color:  
Options:  
Modified:

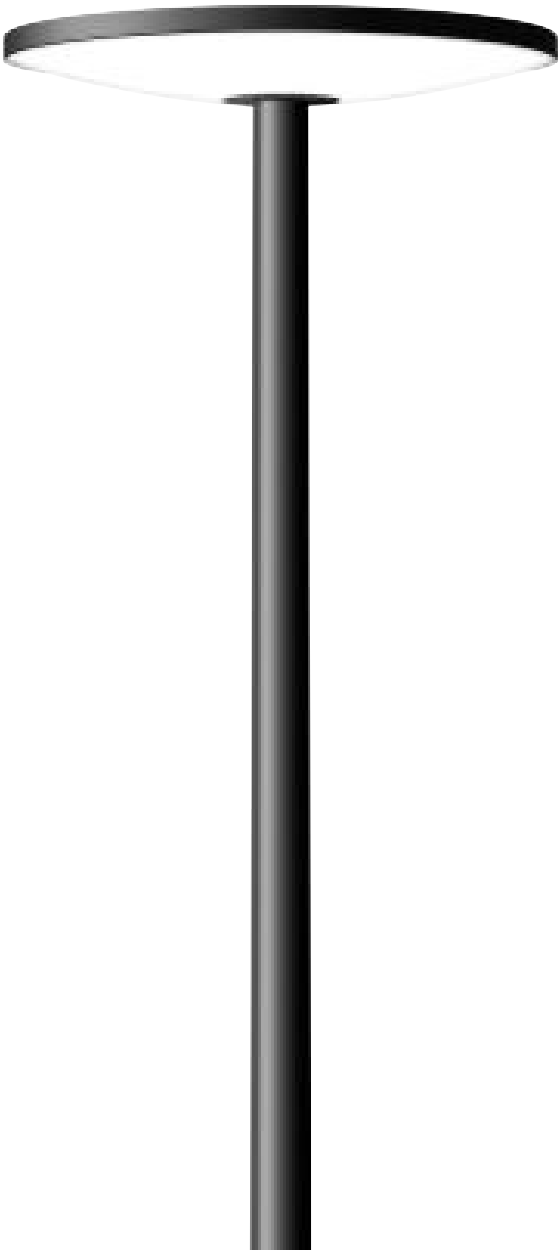

	Lamp	LEED	A	B
88 100	16.8W LED	LZ-2	24 1/4	5 1/2

Recommended for use with 14' to 16' poles.