



### Impact-resistant ceiling and wall luminaires

A series of impact-resistant luminaires made of die-cast aluminum and heavy pressed crystal glass. The exceptional material thickness and strength of crystal glass provides this luminaire group with robustness and defines their character. Arranged individually or in groups, they are great design elements for a host of lighting applications.

Luminaire 33 533 requires a remote 24 V DC class 2 power supply suitable to operate the intended LED wattage, see page 405.


Die-cast aluminum · Crystal glass inside white

LED color temperatures: 2700 K, 3000 K, 3500 K, 4000 K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at [www.bega-us.com](http://www.bega-us.com)

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations · Protection class IP 65

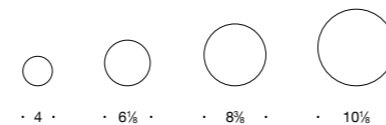

Ceiling and wall luminaires

	LED	A	B	Required wiring box
<b>33 533*</b>	ADA 1.0 W	4	2	<b>19 538</b>
<b>33 534</b>	ADA 2.8 W	6 1/8	2 3/8	-
<b>33 535</b>	ADA 4.7 W	8 3/8	2 3/4	-
<b>33 523</b>	ADA 10.5 W	10 1/8	3 1/8	-

\*Remote driver required



Ceiling and wall luminaires

	LED	A	B
<b>33 502</b>	ADA 2.8 W	6 1/4	2 7/8
<b>33 503</b>	ADA 4.7 W	8 3/8	3 1/8
<b>33 504</b>	ADA 10.5 W	10 1/8	3 1/2