



Garden bollards
with shielded, directed light

A series of pathway luminaires with shielded, directed light for use in the private sector. These luminaires are ideally suited for gardens, entryways, and for many applications on paths and terraces. Anchorage units are available for direct burial in concrete or soil, or with a hardscape base for installation on foundations or paved surfaces.

Die cast and extruded aluminum · Clear safety glass
Reflector made of pure anodized aluminum · Galvanized steel anchorage

LED color temperatures: 2700K, 3000K, 3500K, 4000K

BEGA luminaires offer a minimum service life of 60,000 hours, with suitable LED replacement modules guaranteed for up to 20 years after date of purchase. Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com


All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White, as well as optionally available RAL and custom colors, are a polyester powder.

NRTL listed to North American standards · Suitable for wet locations
Protection class IP 65




77 263 · 77 264

77 239 · 77 249

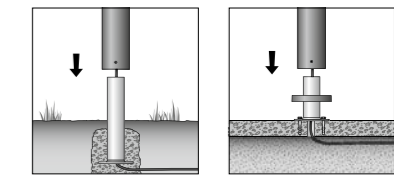


Direct burial

Hardscape base



Garden bollards		LED	A	B	C	D
77 263	with direct burial anchorage	2.1 W	4%	27%	4%	—
77 264	with hardscape base	2.1 W	4%	27%	4%	4%



Garden bollards		LED	A	B	C	D
77 239	with direct burial anchorage	1.9 W	3	27%	5	—
77 249	with hardscape base	1.9 W	3	27%	5	2%

