


BEGA

Photometric Filename: 50060.IES

TEST: LI_50060
 TEST LAB: BEGA
 DATE: 8/8/2016
 LUMINAIRE: 50060.X
 LAMP: 13.4W LED

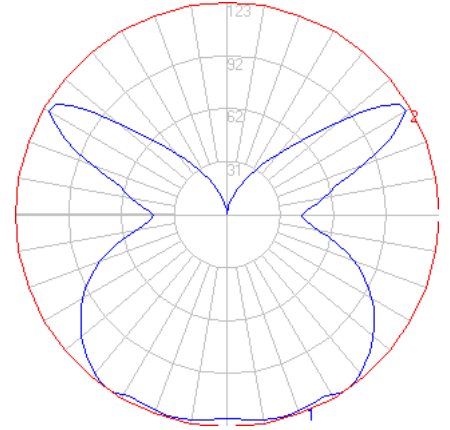


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	980
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	61
Total Luminaire Watts	16
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.47 ft (Diameter)
Luminous Height	0.25 ft

Zonal Lumen Summary

Zone	Lumens
0-10	11.46
10-20	34.50
20-30	55.83
30-40	76.78
40-50	89.55
50-60	93.40
60-70	87.56
70-80	70.59
80-90	51.65
90-100	53.98
100-110	71.34
110-120	102.49
120-130	96.57
130-140	49.00
140-150	22.80
150-160	9.34
160-170	2.74
170-180	0.24

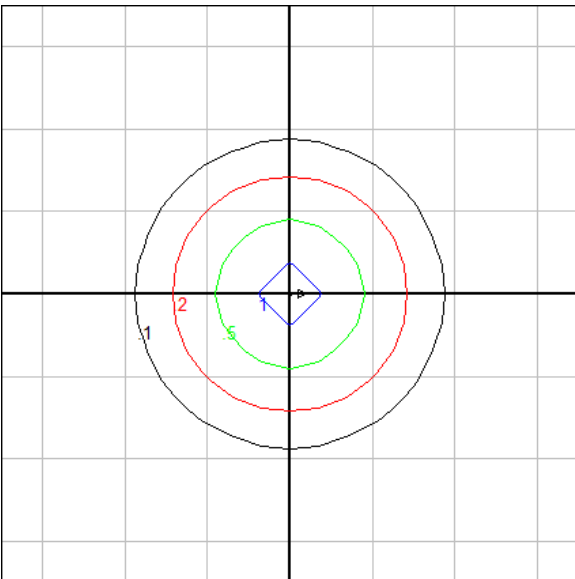

Mounting Height = 10 ft. Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.