


BEGA

Photometric Filename: 56624.IES

TEST: LI_56624
 TEST LAB: BEGA
 DATE: 10/17/2016
 LUMINAIRE: 56 624.2
 LAMP: 52.6W LED

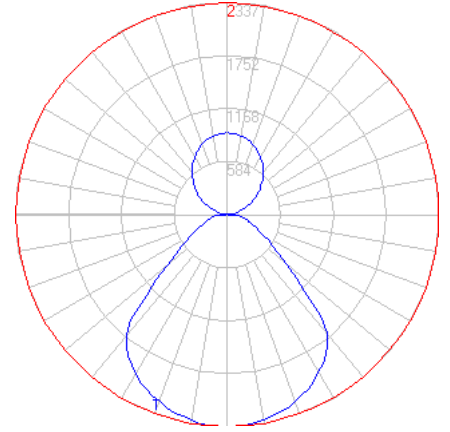


Characteristics

| | |
|---------------------------------|-----------------|
| Lumens Per Lamp | N.A. (absolute) |
| Total Lamp Lumens | N.A. (absolute) |
| Luminaire Lumens | 7705 |
| Total Luminaire Efficiency | N.A. |
| Luminaire Efficacy Rating (LER) | 128 |
| Total Luminaire Watts | 60 |
| Ballast Factor | 1.00 |
| CIE Type | Semi-Direct |
| Spacing Criterion (0-180) | 1.28 |
| Spacing Criterion (90-270) | 1.28 |
| Spacing Criterion (Diagonal) | 1.32 |
| Basic Luminous Shape | Rectangular |
| Luminous Length (0-180) | 0.94 ft |
| Luminous Width (90-270) | 4.87 ft |
| Luminous Height | 0.00 ft |

Zonal Lumen Summary

| Zone | Lumens |
|---------|--------|
| 0-10 | 220.88 |
| 10-20 | 634.50 |
| 20-30 | 969.77 |
| 30-40 | 1171.7 |
| 40-50 | 981.68 |
| 50-60 | 587.03 |
| 60-70 | 385.67 |
| 70-80 | 269.06 |
| 80-90 | 119.13 |
| 90-100 | 42.56 |
| 100-110 | 154.99 |
| 110-120 | 273.38 |
| 120-130 | 367.32 |
| 130-140 | 420.73 |
| 140-150 | 420.63 |
| 150-160 | 359.10 |
| 160-170 | 241.45 |
| 170-180 | 85.06 |

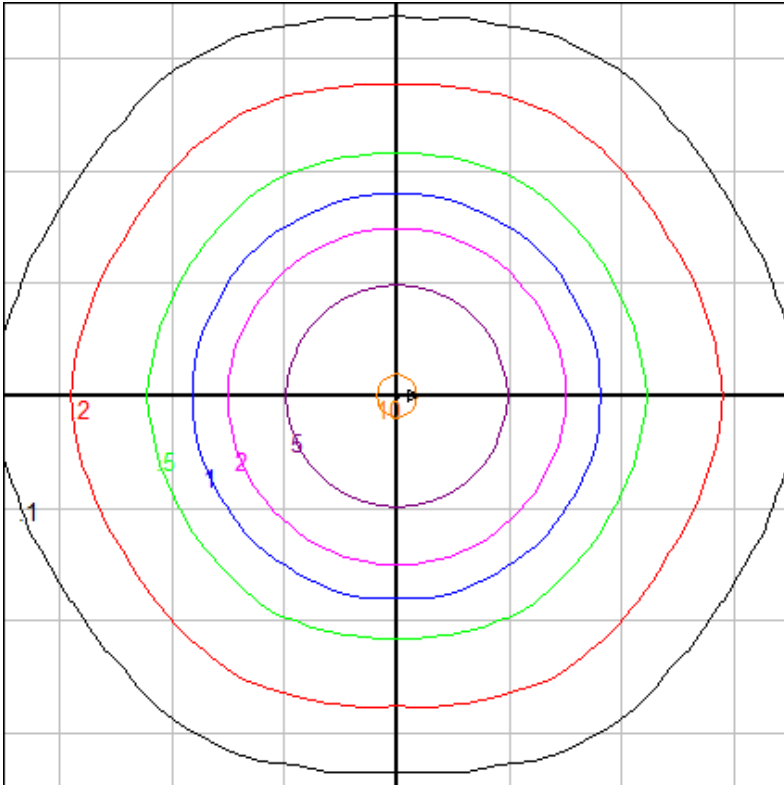

Mounting Height (AFF) = 15 ft.

Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.